

## Key Features

Bright Images in Large Spaces | Long-Lasting Laser Phosphor Light Source | Reliable 24/7 Operation | 360-Degree Orientation | Peace of Mind




## Product Description

Bright and versatile for any professional installation, the ViewSonic® LS750WU WUXGA laser projector delivers everything you need for big screens in big venues. Delivering 5,000 lumens of advanced high brightness, 300,000:1 contrast ratio, and up to 20,000 hours\* of light source life, this projector is ideal for auditoriums, lecture halls, large boardrooms, houses of worship, and more. Thanks to SuperColor™ technology, content is brought to life with captivating color, crisp graphics, and stunning videos no matter the environment. This top-notch performer is also easy to deploy and manage with its wide 1.3x optical zoom adjustment, vertical/horizontal keystone, and 4-corner adjustment that provides extreme flexibility in even the most challenging installations. Moreover, 360-degree tilt angle projection and 24/7 operation allow for extreme mounting flexibility. The ViewSonic® LS750WU is the ideal WUXGA laser projector for professional installations, large venues, and business and education environments. \*Light source life may vary based on actual usage and other factors.




01 IR remote sensor  
02 Projection lens  
03 Elevation feet  
04 Control Panel  
Power Button  
Zoom/Focus

05 USB 2.0 Type A  
06 HDMI x2  
07 AC In  
08 Kensington® Lock Slot  
09 VGA  
10 Monitor Out

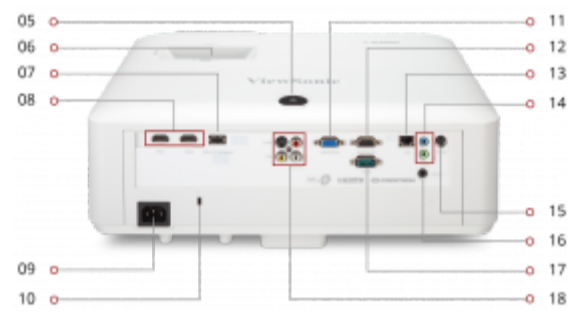


11 LAN  
12 Audio In/Out  
13 3D VESA (Sync)  
14 12V Trigger  
15 RS232  
16 Composite AV In  
17  
18



1920 x 1200  
**RESOLUTION**



5,000 ANSI  
**LUMENS**



1.13-1.47  
**THROW RATIO**

### Contact Sales

- call: 888.881.8781
- email: [salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com)
- visit: [viewsonic.com](http://viewsonic.com)

**Display:**

Type:	DLP Laser
Resolution Type:	WUXGA (1920x1200)
Resolution:	1920 x 1200
Brightness (Lumens):	5,000 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	2.4 - 31.2 ft / 0.7 - 9.5 m
Throw Ratio:	1.13-1.47
Keystone:	Vertical (± 40°) / Horizontal (± 40°)
Lens:	1.3x optical zoom
Light Source (watt):	Nichia 67W x2
Light Source Life, Normal (hours):	20000
Light Source Life, Dynamic Eco-Mode (hours):	20000
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	3,000,000:1
Aspect Ratio:	16:10

**Video Signal:**

Frequency Horizontal:	15K-102KHz
Frequency Vertical:	23-120Hz

**Compatibility:**

PC Resolution (max):	1920 x 1200
PC Resolution (min):	640 x 480
Mac® Resolution (max):	1920 x 1200
Mac® Resolution (min):	640 x 480

**Connector:**

USB 2.0 Type A(1), Ethernet LAN (RJ45)(1), 3.5mm 12V Trigger(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS-232)(1), HDMI 1.4 (with HDCP 1.4)(2), VGA In(1), VGA Out(1), Composite RCA Video In(1), S-Video In(1), Mini USB(1), RCA Audio In (L/R)(1), 3D VESA(1)

**Audio:**

Internal Speakers:	10W (x2)
--------------------	----------

**Controls:**

On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)
--------------------	--------------------------------------------------------------------------------------------------------------------

**Operating Conditions:**

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	0-90%

**Additional Hardware:**

Kensington Lock Slot:	1
-----------------------	---

**Weight (imperial):**

Net (lbs):	13.0
Gross (lbs):	18.5

**Weight (metric):**

Net (kg):	5.9
Gross (kg):	8.4

**Dimensions (imperial) (WxHxD):**

Packaging (in.):	20.3 x 19.3 x 10.9
Physical (in.):	15.9 x 12.0 x 5.7

**Dimensions (metric) (WxHxD):**

Packaging (mm):	515.0 x 490.0 x 276.0
Physical (mm):	405.0 x 305.0 x 145.0

**General:**

Regulations: FCC, cTUVus, ROHS

PACKAGE CONTENTS: LS750WU projector, Power Cable, VGA Cable, Remote Control, Quick Start Guide

Warranty: Five-year limited warranty on parts and labor, 1-year limited warranty on the light source, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907003048

**Accessories:**

IFP2410, IFP2710, PGD-350, PJ-SCW-1001W, PJ-WMK-006, PJ-WMK-007, VC10, VCB10