


Key Features

Long-Lasting Laser Phosphor Light Source | Bright Images in Large Spaces | Large Images in Small Spaces | One-wire HDBT® Input | Network Capable



Product Description


Featuring stunning WUXGA resolution and 4,500 lumens of brightness, the ViewSonic® LS831WU Laser Projector is the ideal solution for modern business and education environments. Designed with a laser phosphor light source lasting up to 20,000 hours, this projector delivers long-term, virtually maintenance-free usage for any boardroom or classroom. With its 0.25 ultra-short throw ratio, HV keystoneing and 4 corner adjustments, the LS831WU makes installation a hassle-free experience. What's more, the ultra-short throw ratio allows you to place the projector just inches away from a wall or screen to give you a huge image for less cost than a comparably sized display. Powered by SuperColor technology for true-to-life images, and SonicExpert® technology for incredibly clear sound, the LS831WU delivers an immersive audiovisual performance.

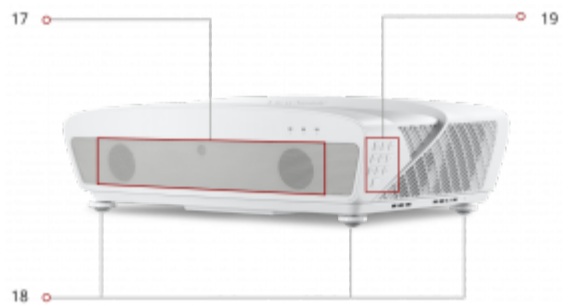

- | | |
|-------------------------|--------------------------|
| 1. Projection Lens | 7. Kensington® Lock Slot |
| 2. USB Type A (powered) | 8. Security Bar |
| 3. HDMI x2 | 9. AC In |
| 4. HDBaseT | 10. VGA In |
| 5. LAN | 11. RS232 |
| 6. 12V Trigger | 12. S-Video In |




- | | |
|-----------------------|-------------------|
| 13. Component In | 19. Menu Controls |
| 14. 3D VESA | |
| 15. Audio In/Out | |
| 16. Monitor Out | |
| 17. Speakers (10W x2) | |
| 18. Elevation Feet | |



1920 x 1200
RESOLUTION



4,500 ANSI
LUMENS



0.252
THROW RATIO

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Type:	DLP Laser
Resolution Type:	WUXGA (1920x1200)
Resolution:	1920 x 1200
Brightness (Lumens):	4,500 ANSI
Display Size (in.):	70 - 200 in. / 1.8 – 5.1 m
Throw Distance:	0.2 - 2.4 ft / 0.1 - 0.7 m
Throw Ratio:	0.252
Keystone:	Vertical (± 5°) / Horizontal (± 5°)
Light Source (watt):	67W X 2
Light Source Life, Normal (hours):	20000
Color Depth:	1.07 Billion Colors
Dynamic Contrast Ratio:	3,000,000:1
Aspect Ratio:	16:10

Video Signal:

Frequency Horizontal:	15K~102KHz
Frequency Vertical:	23~120Hz

Compatibility:

PC Resolution (max):	3840 x 2160
PC Resolution (min):	640 x 480
Mac® Resolution (max):	3840 x 2160
Mac® Resolution (min):	640 x 480

Connector:

USB 2.0 Type A(1), Ethernet LAN (RJ45)(1), 3.5mm 12V Trigger(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI 2.0 (with HDCP 2.2)(2), VGA In(1), VGA Out(1), Composite RCA Video In(1), S-Video In(1), RCA Audio In (L/R)(1), 3D VESA(1), HDBT(1)

Audio:

Internal Speakers:	10W (x2)
--------------------	----------

Power:

Voltage:	100-240V+/- 10%, 50/60Hz AC
Consumption (typical):	504W
Stand-by:	<0.5W

Controls:

Physical Controls:	Keypad, Power key
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
--------------	-----------------------

Weight (imperial):

Net (lbs):	21.8
Gross (lbs):	28.8

Weight (metric):

Net (kg):	9.9
Gross (kg):	13.1

Dimensions (imperial) (WxHxD):

Packaging (in.):	25.7 x 21.2 x 11.6
Physical (in.):	19.3 x 15.2 x 6.1

Dimensions (metric) (WxHxD):

Packaging (mm):	645.0 x 540.0 x 295.0
Physical (mm):	492.0 x 387.0 x 157.0

General:

Regulations: FCC, cTUVus

PACKAGE CONTENTS: LS831WU projector, power cable, VGA cable, remote control, Quick Start Guide,

Warranty: Three-year limited warranty on parts and labor, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907005448

Accessories:

BCP100, BCP120, IFP2710, PGD-350, PJ-SCW-1001W, PJ-WMK-304, VC10, VCB10, WMK-027