



Key Features

- 5,000 Lumen Brightness | Vertical Lens Shift with Centered Lens |
- PortAll®: Discreet Wireless Streaming | Network Monitoring & Control |
- SuperColor™: Amazing Color Accuracy



Product Description


Delivering 1920 x 1080 resolution and 5000 lumens of brightness, the ViewSonic® PG800HD is the ideal 1080p projector for professional installations, large venues, and business and education environments. With its 1.3x optical zoom, centered lens, vertical lens shift, and vertical keystoneing, the PG800HD provides extreme flexibility even in the most challenging installations. The PG800HD boasts a sleek top cover design for quick lamp and accessory access, while an intuitive PortAll® compartment accommodates additional accessories such as an HDBaseT receiver, wireless streaming device, or PC stick. A 4-in-1 power button serves as a central point for LED notifications. Moreover, two HDMI ports and additional audio and video ports allow for extensive connectivity to handle multiple devices without the need to switch cables. Powered by SuperColor™ technology for beautiful image reproduction, and SonicExpert® technology for incredibly clear sound, the PG800HD delivers a professional audiovisual performance.

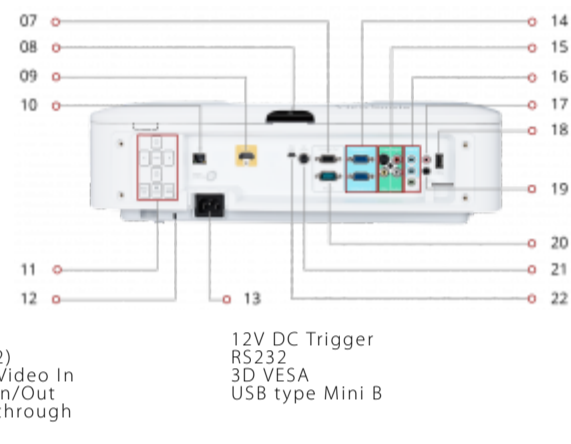

1920 x 1080
RESOLUTION



5,000 ANSI
LUMENS



1.15-1.5
THROW RATIO

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Type:	DLP Lamp
Resolution Type:	HD (1920x1080)
Resolution:	1920 x 1080
Brightness (Lumens):	5,000 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	2.5 - 32.7 ft / .76 - 10 m
Throw Ratio:	1.15-1.5
Keystone:	Vertical (+/- 40°)
Lens:	1.3x Manual optical zoom / manual optical focus

Light Source (watt): 370

Light Source Life, Normal (hours): 2000

Light Source Life, Dynamic Eco-Mode (hours): 2500

Color Depth: 1.07B Color (R/G/B 10bit)

Dynamic Contrast Ratio: 5,000:1

Aspect Ratio: 16:9

Video Signal:

Frequency Horizontal: 15K~102KHz

Frequency Vertical: 23~120Hz

Compatibility:

PC Resolution (max): 1920 x 1200

Mac® Resolution (max): 1920 x 1200

Connector:

USB 2.0 Type A(1), USB 2.0 Type B(1), Ethernet LAN (RJ45)(1), 3.5mm 12V Trigger(1), 3.5mm Audio Out(1), 3.5mm Audio In(2), Control (RS232)(1), HDMI(2), VGA In(2), VGA Out(1), Composite RCA Video In(1), S-Video In(1), Mini USB(1), RCA Audio In (L/R)(1), 3D VESA(1), IR out(1)

Audio:

Internal Speakers: 10W (x2)

Power:

Voltage: 100-240V+/- 10%, 50/60Hz AC

Consumption (max): 574W

Stand-by: <0.5W

Controls:

Physical Controls: Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source

On Screen Display: Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

Operating Conditions:

Temperature: 32-104° F (0 - 40° C)

Humidity (non-condensing): 0-90%

Additional Hardware:

Kensington Lock Slot: 1

Weight (imperial):

Net (lbs): 13.7

Gross (lbs): 18.7

Weight (metric):

Net (kg): 6.2

Gross (kg): 8.5

Dimensions (imperial) (WxHxD):

Packaging (in.): 22.7 x 21.1 x 10.2

Physical (in.): 18.5 x 12.4 x 5.5

Dimensions (metric) (WxHxD):

Packaging (mm): 577 x 537 x 260

Physical (mm): 470 x 316 x 140

General:

AV Control: AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified

Regulations: FCC, ROHS, cTUVus

PACKAGE CONTENTS: PG800HD projector, power cable, VGA cable, remote control with AAA batteries, Quick Start Guide

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907934113

Accessories:

PGD-350, PJ-SCW-1001W, PJ-WMK-006, PM-FCP, PRJ-EE-09-03, PRJ-EEEW-09-01, PRJ-EEEW-09-02, PRJ-EW-09-01, PRJ-EW-09-02, RLC-103, VC10, VC10-S, VCB10