

Key Features

Reduced Input Latency | Bright Images in Any Environment (3,000 Lumens) | Large Images in Small Spaces | USB Type-C for Video and Power | SonicExpert® Technology




Product Description

For convenient big screen gaming and entertainment, the ViewSonic® PX706HD projector delivers huge images in small spaces. With a short throw lens, this projector can be placed just a few feet away from a wall or screen, and project an immersive 100" image – making it perfect for big gaming sessions in smaller rooms. 3,000 lumens of brightness and Full HD 1920x1080 resolution provide vivid, ultra-sharp images and graphics, while an ultra-low input latency ensures faster frame-by-frame action and smooth gameplay without delay. What's more, Full HD 3D compatibility lets you enjoy 3D movies and games, while an internal speaker delivers room-filling sound for an immersive audiovisual experience.



<p>01 Menu Controls 02 Elevation Feet 03 Zoom Ring 04 IR Remote Sensor 05 Projection Lens VGA In</p>	<p>04 USB Type-C 05 HDMI (x2) Audio In Audio Out AC In RS232</p>
--	--

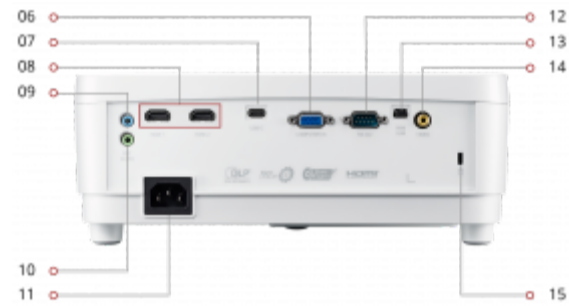


06 USB Mini
07 Video
08 Kensington® Lock Slot
09



1920 x 1080
RESOLUTION



3,000 ANSI
LUMENS



0.69-0.83
THROW RATIO

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Type:	DLP Lamp
Resolution Type:	HD (1920x1080)
Resolution:	1920 x 1080
Brightness (Lumens):	3,000 ANSI
Display Size (in.):	60 - 120 in. / 1.5 - 3.0 m
Throw Distance:	3.0 - 7.2 ft / 0.9 - 2.2 m
Throw Ratio:	0.69-0.83
Keystone:	Vertical digital keystone correction (± 20°)
Lens:	1.2x optical zoom
Light Source (watt):	240
Light Source Life, Normal (hours):	4000
Light Source Life, Dynamic Eco-Mode (hours):	15000
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	22,000:1
Aspect Ratio:	16:9

Video Signal:

Frequency Horizontal:	15K~102KHz
Frequency Vertical:	23~120Hz

Compatibility:

PC Resolution (max):	1920 x 1080
PC Resolution (min):	640 x 480
Mac® Resolution (max):	1920 x 1080
Mac® Resolution (min):	640 x 480

Connector:

USB 3.1 Type C(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI 1.4(2), VGA In(1), Composite RCA Video In(1), Mini USB(1)

Audio:

Internal Speakers:	5W (x1)
--------------------	---------

Power:

Voltage:	100-240V+/- 10%, 50/60Hz AC
Consumption (typical):	310W
Stand-by:	<0.5W

Controls:

Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	0-90%

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial):

Net (lbs):	6.0
Gross (lbs):	8.4

Weight (metric):

Net (kg):	2.7
Gross (kg):	3.8

Dimensions (imperial) (WxHxD):

Packaging (in.):	14.4 x 7.4 x 11.8
Physical (in.):	11.5 x 4.5 x 8.7

Dimensions (metric) (WxHxD):

Packaging (mm):	365.0 188.0 x 300.0
Physical (mm):	293.0 x 115.0 x 220.0

General:

Regulations: FCC, cTUVus, ROHS

PACKAGE CONTENTS: PX706HD projector, power cable, USB Type C cable, remote control, Quick Start Guide

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907958911

Accessories:

HB10B, PGD-350, PJ-SCW-1001W, PJ-WMK-006, PJ-WMK-305, PM-FCP, PRJ-EE-07-03, PRJ-EEEW-07-01, PRJ-EEEW-07-02, PRJ-EW-07-01, PRJ-EW-07-02, RLC-118, VC10, VCB10

Awards: