

Specification



Model Name	FAB-T1.95	FAB-T2.5	FAB-T2.6
Pixel Pitch (mm)	1.95	2.5	2.6
Pixel Density (dot/m ²)	262,144	160,000	147,456
LED Configuration	SMD1212	SMD1515	SMD1515
Brightness (cd/m ²)	800-1,000	800-1,000	800-1,000
Module Dimension	250mm*250mm(9.84in*9.84in)		
Module Resolution (PX*PX)	128*128	100*100	96*96
Weight Per Module (kg)	0.36	0.34	0.33
Cabinet Dimension	515mm*2,082mm*630mm(20.28in*81.97in*24.8in)		
Poster Resolution (PX*PX)	256*1024	200*800	192*768
Weight Per Cabinet (kg)	40		
Power Consumption Max/ Average (W/m ²)	480/150	480/150	480/150
Viewing Angle Horizontal/Vertical (Deg)	160/160		
Grey Scale (bit)	14		
Refresh Rate (Hz)	3,840		
Input Voltage (V)	AC100-240V		
Working Temperature (°C)	-20~+50°C		
Operation Humidity (RH)	10%~95%		
Ingress Protection	IP20		
Service Access	Front		
Certificates(T Series)	CE(EMC, LVD), FCC, ETL, CB		
Processing Platform	Novastar/Colorlight		

Notes: The specifications are for reference, actual values may vary.



www.fabuluxled.com

FABULUX HQ SZ | FABULUX DG | FABULUX US | FABULUX EU | FABULUX ME


fabulux@fabuluxled.com

T Poster Series

Convenient and Mobile Indoor Advertising Poster

Product Size

- T series indoor structure allows versatile applications possible
- Ultra lightweight and slim
- Fast heat dissipation

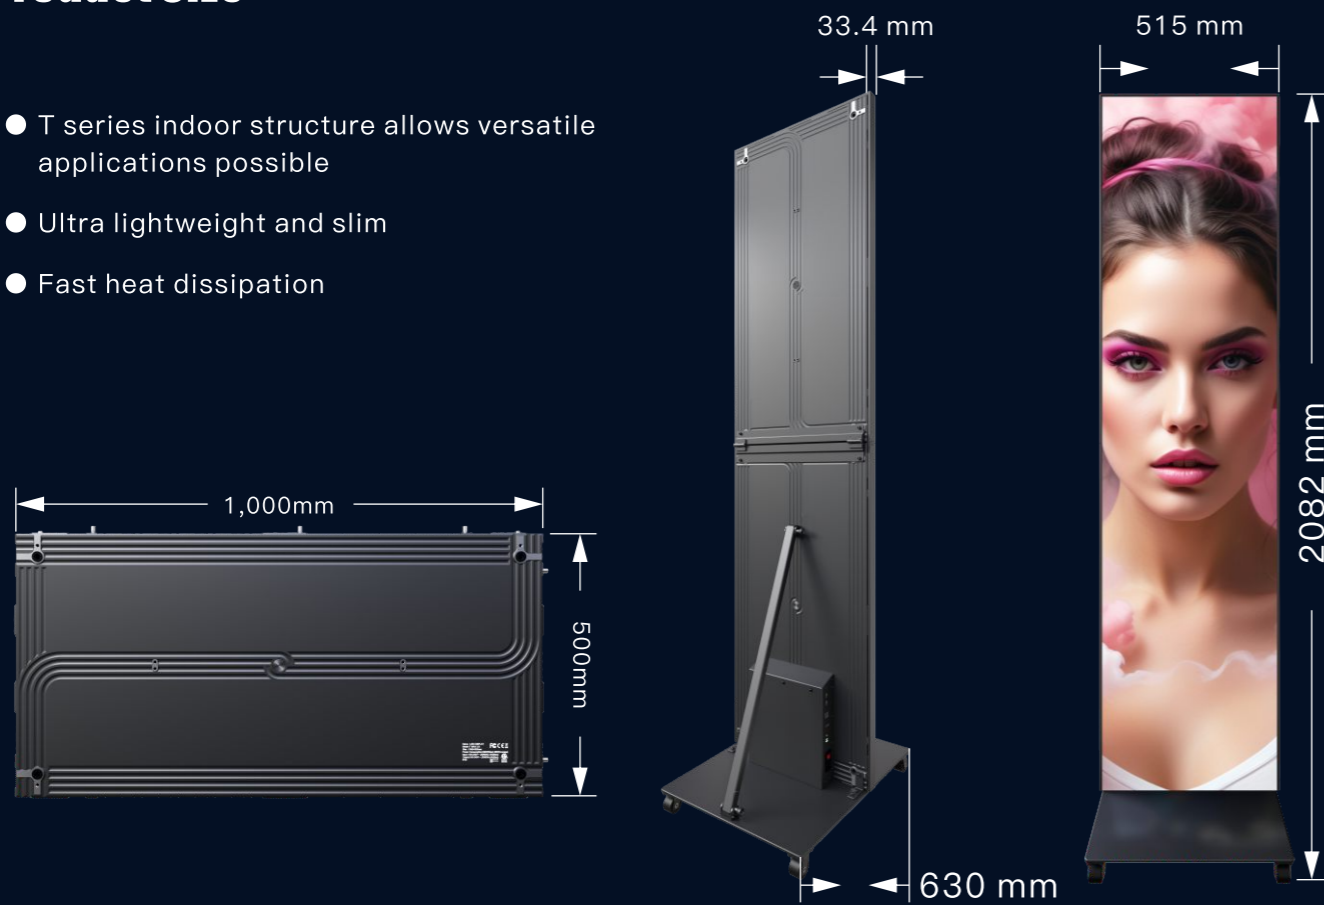


Foldable Structure for Your Better Convenience

- Fixed on the ground or portable with wheels optional
- Foldable design for transportation and space saving



Multiple Control

- Centralized remote control and monitor
- Perfect advertising solution for retail stores, shopping center, station message guidelines, etc

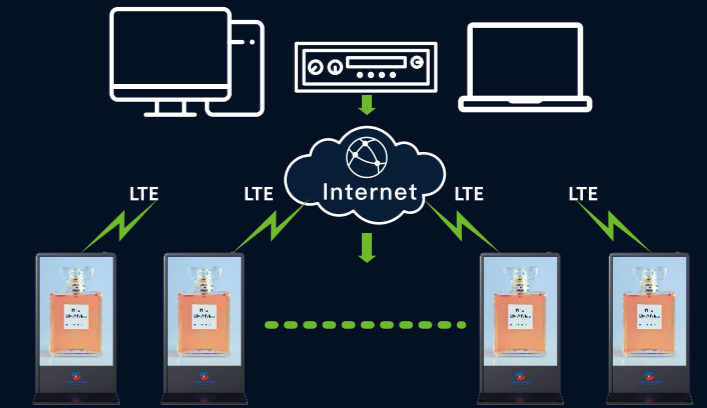

Remote centralized publishing

Remote centralized monitoring

Multiple Applications

- Single unit for stand-alone advertising
- Multi units for seamless splicing



Applications, wherever you can imagine

